

36mm sq.**San Ace 36**



28mm thick (GV type)

**General Specifications**

- Material Frame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-1)
- Expected Life Refer to specifications (L10:Survival rate:90% at 60°C ,
rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black (Sensor) yellow
- Storage Temperature -20°C to +70°C (Non-condensing)


36×36×28mm [Mass : 46g] **GV type****Specifications** The following nos. **have pulse sensors and ribs.**

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Air Flow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9GV3612J301	12	7.0 to 13.2	0.75	9.0	19,000	0.55	19.4	525	2.108	58.5
9GV3612G301			0.34	4.08	14,000	0.40	14.1	275		
									1.104	52.0
									-20 to +60	40,000

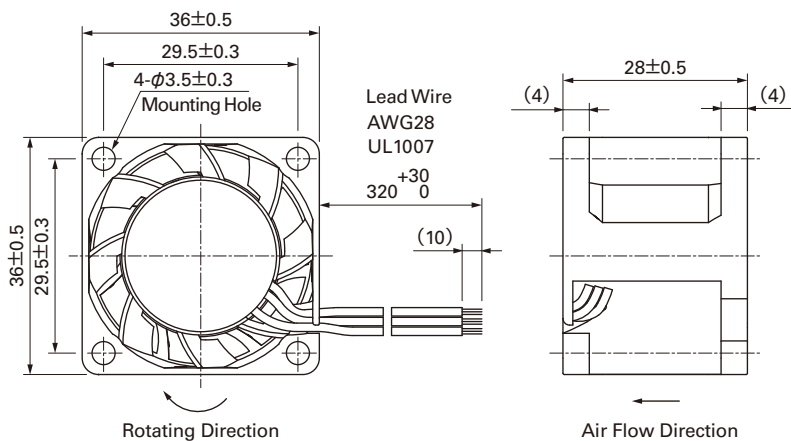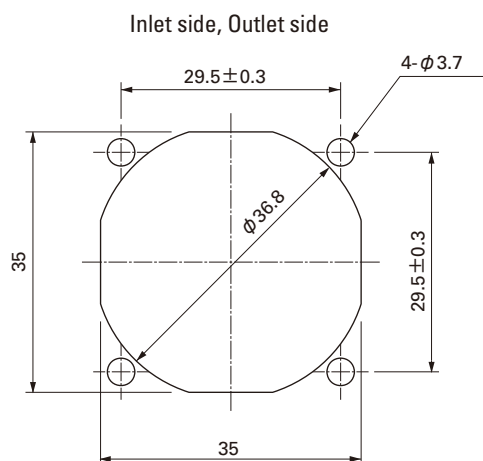
Available options: ⇒ **Without Sensor**Please inquire as the availability of these functions depend on the model. ⇒ **Lock Sensor** **PWM Control****Dimensions (Unit : mm)****Reference dimension of mounting holes and vent opening (Unit : mm)**

Options (Unit : mm)


Finger guards
Model : 109-1050 Surface treatment : Nickel-chrome plating (silver) Color

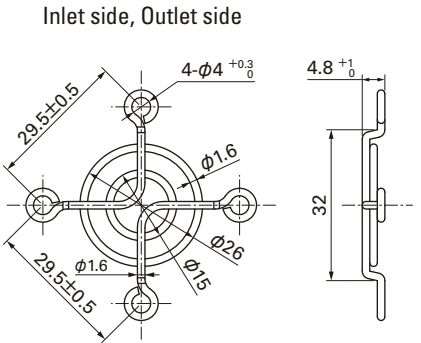

Air Flow - Static Pressure Characteristics

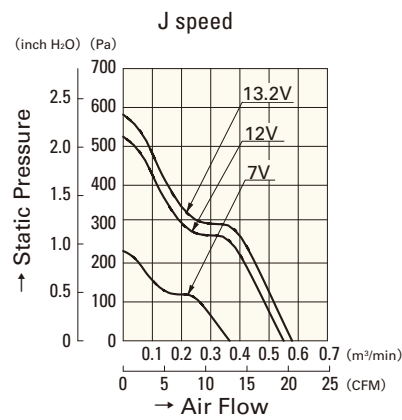

9GV3612J301

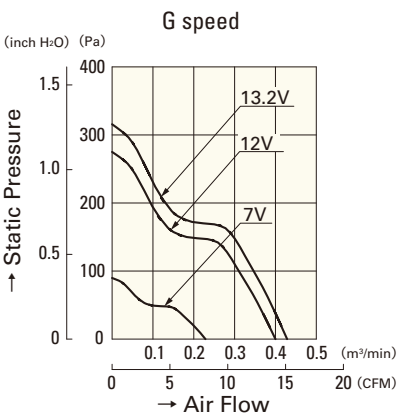

9GV3612G301