# 40×40×15 mm

## San Ace 40WF 9WF type 🚱 🛕 🗫



#### General Specifications

· Material ····· Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)

· Expected life ······ See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C,

rated voltage)

· Motor protection function ······ Locked rotor burnout protection, Reverse polarity protection

For details, please refer to p. 547.

· Dielectric strength · · · · · · 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)

· Insulation resistance·············· 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)

· Sound pressure level (SPL) ······ At 1 m away from the air inlet

· Lead wire ······· ⊕Red ⊝Black Sensor Yellow

• Mass ----- 35 g

This fan can be used in environments with oil mist.\*

\* Environment where cutting oil creates oil mist. Conduct a product evaluation with the type of oil to be use

### Specifications

The models listed below have ribs and pulse sensors.

	Model no.	Rated voltage	Operating voltage range	Rated current Rated input		Rated speed	Max. airflow		Max. static pressure		SPL	Operating temperature	Expected life
	Wiodel III.	[V]	[V]	[A]	[W]	[min <sup>-1</sup> ]	[m³/min]	[CFM]	[Pa]	[inchH2O]	[dB (A)]	[°C]	[h]
	9WF0424H701	24	20.4 to 27.6	0.085	2.04	11300	0.195	6.9	80	0.32	38	-20 to +70	40000/60°C


The following sensor and control options are available for selection.

Available for all models. Without sensor Lock sensor

#### Airflow - Static Pressure Characteristics


9WF0424H701 With pulse sensor


Operating voltage range

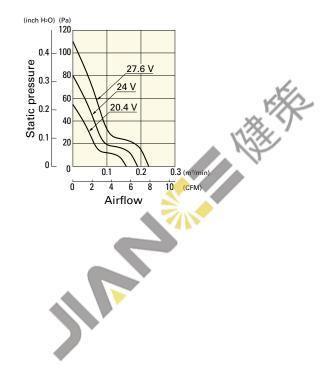






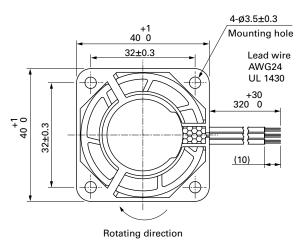



## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side



## Options

Finger guards

page: p. 532

Model no.: 109-059, 109-059H







# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Sanyo Denki:

9WF0424H701 9WF0424H702 9WF0424H7D01



