60×60×25 mm

San Ace 60WF 9WF type 🚱 🛆 🔊





| General Specifications | ~~~~ |
|---|--|
| • Material | Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0) |
| Expected life ····· | See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) |
| Motor protection function | Locked rotor burnout protection, Reverse polarity protection For details, please refer to p. 547. |
| Dielectric strength ······ | 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame) |
| Insulation resistance | 10 M Ω or more with a 500 VDC megger (between lead wire conductors and frame) |
| · Sound pressure level (SPL) ······ | At 1 m away from the air inlet |
| Storage temperature | -30 to +70°C (Non-condensing) |
| · Lead wire | ⊕Red ⊝Black Sensor Yellow |
| • Mass ····· | 110 g |
| This fan can be used in environments with | oil mist * |

This fan can be used in environments with oil mist.*

* Environment where cutting oil creates oil mist. Conduct a product evaluation with the type of oil to be used.

Specifications

The models listed below have ribs and pulse sensors.


| Model no. | Rated voltage | Operating voltage range | Rated current | Rated input | Rated speed | Max. a | iirflow | Max. stat | tic pressure | SPL | Operating temperature | Expected life |
|-------------|---------------|-------------------------|---------------|-------------|----------------------|----------|---------|-----------|--------------|----------|-----------------------|---------------|
| | [V] | [V] | [A] | [W] | [min ⁻¹] | [m³/min] | [CFM] | [Pa] | [inchH2O] | [dB (A)] | [°C] | [h] |
| 9WF0624H401 | 24 | 20.4 to 27.6 | 0.15 | 3.6 | 6500 | 0.67 | 23.6 | 97 | 0.38 | 41 | -20 to +70 | 40000/60°C |

The following sensor and control options are available for selection. Available for all models. Without sensor Lock sensor

Airflow - Static Pressure Characteristics

9WF0624H401 With pulse sensor


Operating voltage range

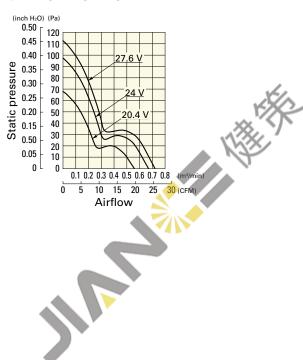






Dimensions (unit: mm)

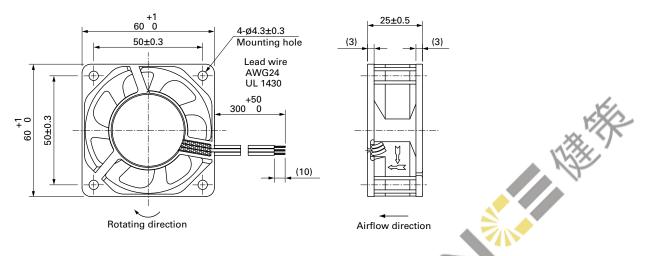

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side 59



Options

Finger guards

page: p. 532

Model no.: 109-139E, 109-139H







Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki: 9WF0624H401 9WF0624H402 9WF0624H4D01





