

92×92×32 mm

San Ace 92 9G type



General Specifications

- Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 547.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass 170 g

Specifications

The models listed below **have ribs and pulse sensors**. For models without ribs, append "1" to the end of model numbers.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m³/min] [CFM]		Max. static pressure [Pa] [inchH ₂ O]		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9G0912A201	12	10.2 to 13.8	0.58	6.96	4300	2.5	88.3	115	0.462	44	-20 to +70	40000/60°C
9G0912S201			0.38	4.56	3500	2.0	70.7	77	0.309	38		
9G0912H201			0.23	2.76	2850	1.59	56.2	51	0.205	32		
9G0912M201			0.13	1.56	2100	1.2	42.4	27	0.108	25		
9G0924A201	24	20.4 to 27.6	0.3	7.2	4300	2.5	88.3	115	0.462	44	-20 to +60	
9G0924S201			0.19	4.56	3500	2.0	70.7	77	0.309	38	-20 to +70	
9G0924H201			0.12	2.88	2850	1.59	56.2	51	0.205	32		
9G0924M201			0.08	1.92	2100	1.2	42.4	27	0.108	25		
9G0948A201	48	40.8 to 55.2	0.16	7.68	4300	2.5	88.3	115	0.462	44		
9G0948S201			0.11	5.28	3500	2.0	70.7	77	0.309	38		
9G0948H201			0.08	3.84	2850	1.59	56.2	51	0.205	32		
9G0948M201			0.05	2.4	2100	1.2	42.4	27	0.108	25		

The following sensor and control options are available for selection.


Available for all models. **Without sensor** **Lock sensor**

Differs according to the model. Refer to the table on p. 568. **PWM control**

Airflow - Static Pressure Characteristics


9G0912A201 With pulse sensor

Operating voltage range

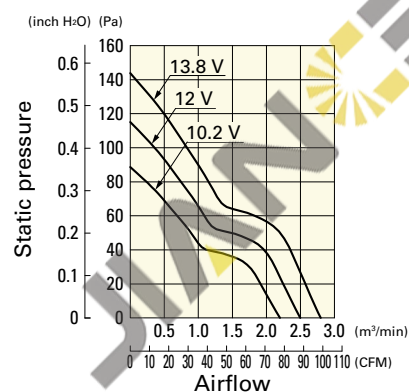


9G0912S201 With pulse sensor

Operating voltage range

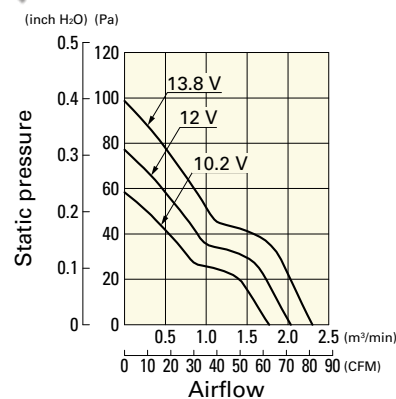

9G0912H201 With pulse sensor


Operating voltage range

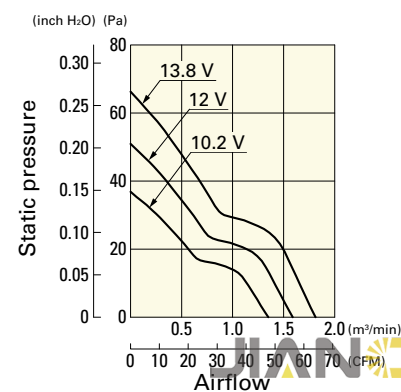

Airflow - Static Pressure Characteristics


9G0912M201 With pulse sensor

Operating voltage range

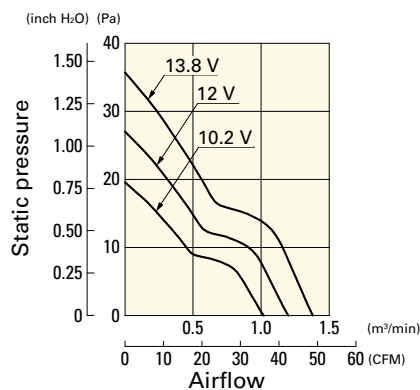


9G0924A201 With pulse sensor

Operating voltage range

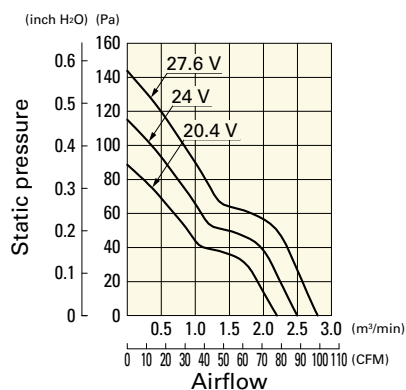


9G0924S201 With pulse sensor

Operating voltage range

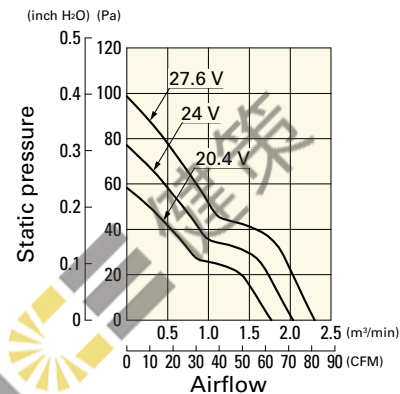


9G0924H201 With pulse sensor

Operating voltage range

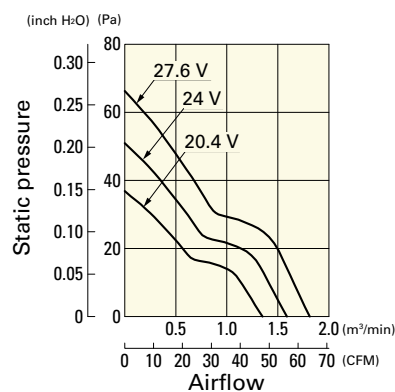


9G0924M201 With pulse sensor

Operating voltage range

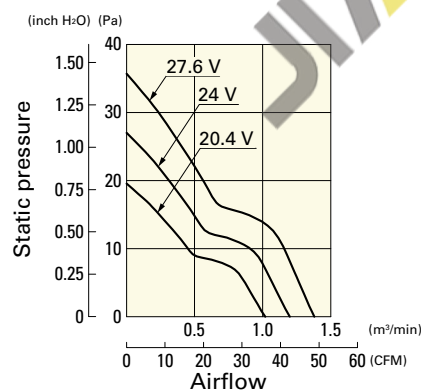


9G0948A201 With pulse sensor

Operating voltage range

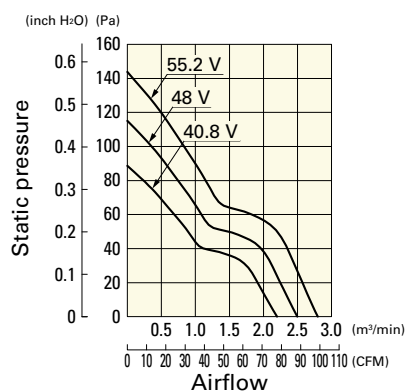


9G0948S201 With pulse sensor

Operating voltage range

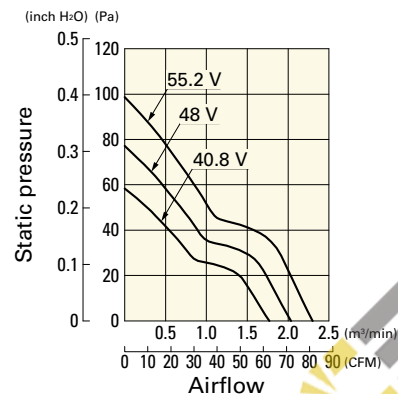


9G0948H201 With pulse sensor

Operating voltage range

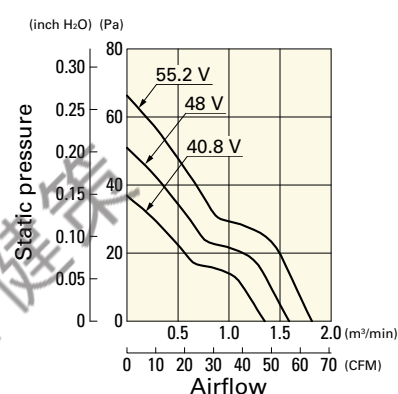


9G0948M201 With pulse sensor

Operating voltage range

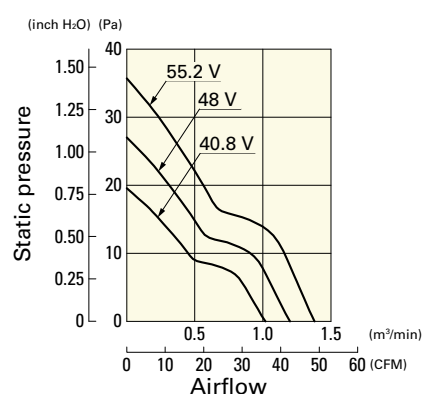


DC


DC Fan 92 mm sq.



■ Dimensions (unit: mm) (With ribs)

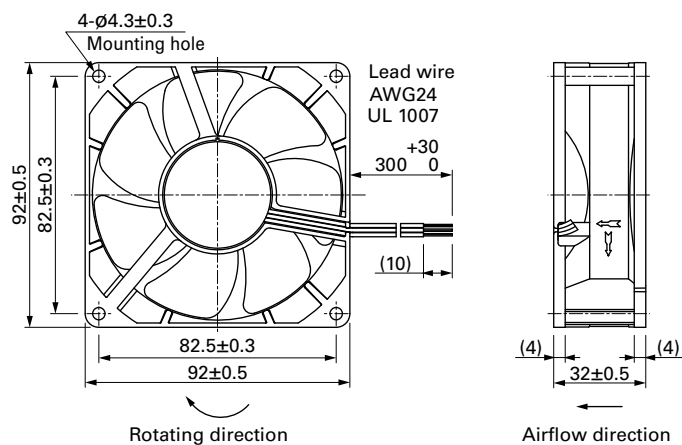

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

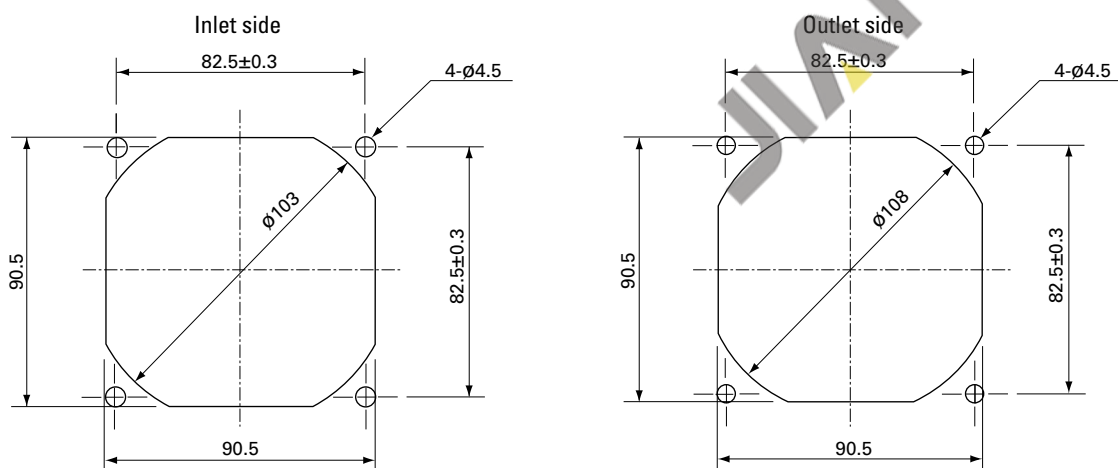

■ Options

Finger guards

page: p. 532

Model no.: 109-099E, 109-099H, 109-099C

Resin finger guards

page: p. 539

Model no.: 109-1001G

Resin filter kits

page: p. 540

Model no.: 109-1001F13 (13PPI), 109-1001F20 (20PPI),
109-1001F30 (30PPI), 109-1001F40 (40PPI)

JIAN 健策

0755—23706799

微信扫码
咨询工程师



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9G0912H201](#) [9G0912S201](#) [9G0912S2011](#) [9G0948H201](#) [9G0912H2011](#) [9G0948S2011](#) [9G0924S201](#)
[9G0912H2D011](#) [9G0912H202](#) [9G0924S2D01](#) [9G0912A201](#) [9G0924A201](#) [9G0912A2011](#) [9G0924H2011](#)
[9G0948H2011](#) [9G0924H201](#) [9G0948S201](#) [9G0924M201](#) [9G0924M2011](#) [9G0924S2011](#) [9G0924A2011](#)
[9G0948M2011](#) [9G0948A2011](#) [9G0948M201](#) [9G0948A201](#) [9G0912M201](#) [9G0912M2011](#) [9G0924H202](#)
[9G0912A2021](#) [9G0924H2D01](#) [9G0924S202](#) [9G0948S2D01](#) [9G0912H2021](#) [9G0912A202](#) [9G0924M202](#)
[9G0948H2D01](#) [9G0948A2D01](#) [9G0912H2D01](#) [9G0948A202](#) [9G0912S2021](#) [9G0924S2D011](#) [9G0948H2021](#)
[9G0924M2021](#) [9G0948A2021](#) [9G0912S2D01](#) [9G0924A2021](#) [9G0924M2D01](#) [9G0948M2D011](#) [9G0924M2D011](#)
[9G0948M2D01](#) [9G0912S202](#) [9G0924A2D01](#) [9G0948A2D011](#) [9G0948H2D011](#) [9G0912M2D011](#) [9G0912M2021](#)
[9G0912M2D01](#) [9G0948S2021](#) [9G0948M2021](#) [9G0912S2D011](#) [9G0948S202](#) [9G0948S2D011](#) [9G0924H2021](#)
[9G0924A202](#) [9G0912A2D01](#) [9G0912A2D011](#) [9G0924H2D011](#) [9G0924A2D011](#) [9G0924S2021](#) [9G0948H202](#)
[9G0948M202](#) [9G0912M202](#) [9G0912P2G03](#) [9G0912P2S01](#) [9G0912P2H01](#) [9G0912P2A01](#)

JIAN 健策

JIAN 健策
0755—23706799

